



# EXTRUTECH PLASTICS, INC.

5902 W. Custer Manitowoc, WI 54220  
 Phone 920-684-9650 Phone 888-818-0118  
 Fax 920-684-4344

## Product Specification Data

Product: **GARAGE DOOR STOP**

Part No. **WM-936**

Available Colors:

- BROWN**
- SANDSTONE**
- ALMOND**
- BLUE WHITE**
- WHITE**


Available Length:

**7 ft. - 19 ft.**

Product Types: **2**

**Style S Bottom Sweep**

**Style T Side Sweep**

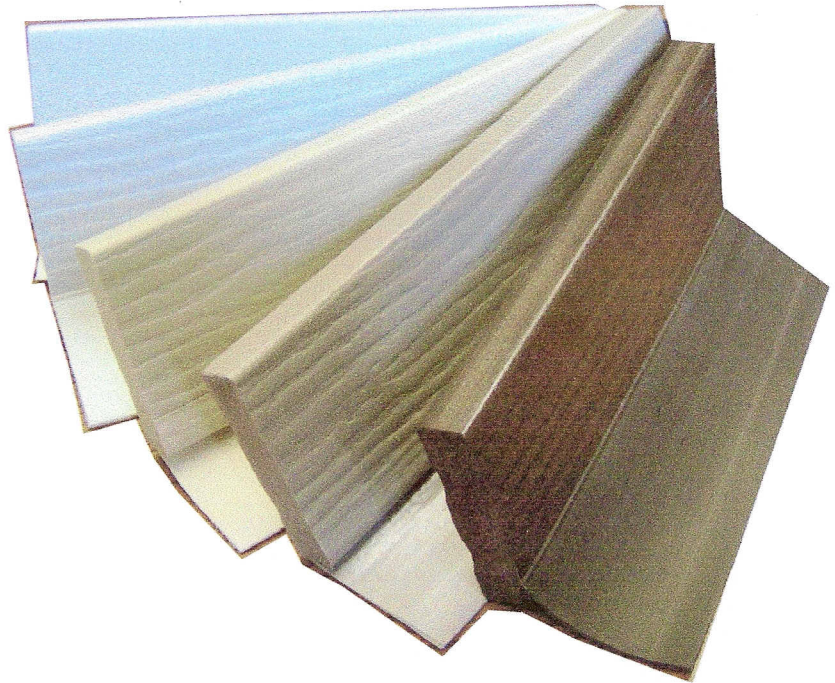


### FEATURES

- Solid, closed cell structure that will not absorb water.
- Excellent impact and skin durability.
- Capstock exterior of .010 in. for maximum UV protection.
- Resists mold, mildew, fungus, salt, insects. Will not rot.
- Standard and custom lengths available.

### TYPICAL PHYSICAL PROPERTIES\*

AP3000 SERIES		Moderate Density Foam Extrusions	
GENERAL PROPERTIES	TEST METHOD	TYPICAL VALUES	
Specific Gravity	ASTM D-792	0.80	
<b>Tensile Properties</b>	ASTM D-638		
Tensile Strength, psi.		2,600	
Tensile Modulus, psi		160,000	
<b>Flexural Properties</b>	ASTM D-790		
Flexural Strength, psi.		5,500	
Flexural Modulus, psi.		185,000	
<b>Impact</b>			
Notched Izod, ft.-lb./inch	ASTM D-256	0.40	
Dart Drop Min Failure	ASTM D-4226	0.18	
<b>Flammability</b>			
Rate of Burning	ASTM D-635	HB rating	
<b>Thermal Properties</b>			
Heat Deflection Temp @264 psi. F	ASTM D-648	150.F	
Coefficient of Lineal Thermal Expansion (in/in/F)	ASTM D696-98	3.0	
<b>Water Absorption</b>	ASTM D570-98	0.8%	

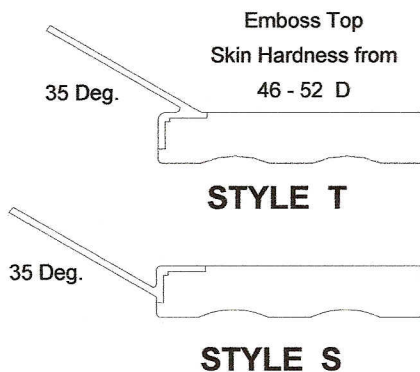

\* Extrutech Plastics reserves the right to revise specifications.

www.epiplastics.com e-mail: info@epiplastics.com